PHILIPS

Philips 32BDL3510Q/00 Signage Display Digital signage flat panel 80 cm (31.5") VA 350 cd/m² Full HD Black
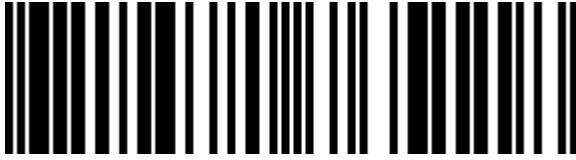
Brand : Philips

Product name : 32BDL3510Q/00

Product code: 32BDL3510Q/00

2 x 10 W RMS, 50-60 Hz, 100-240 V, 1.5 A, 40 W, VA, 16.7 Million, 0.36375 x 0.36375 mm, 16:9, 6.5 ms, 4000:1, 350 cd/m², 1920 x 1080p, 31.5 inch, 80 cm
Philips 32BDL3510Q/00. Product design: Digital signage flat panel. Display diagonal: 80 cm (31.5"), Display technology: VA, Display resolution: 1920 x 1080 pixels, Display brightness: 350 cd/m², HD type: Full HD. Product colour: Black

A↑G G

Display

Display diagonal *	80 cm (31.5")
Display technology *	VA
Display resolution *	1920 x 1080 pixels
Display brightness *	350 cd/m²
HD type *	Full HD
Native aspect ratio	16:9
Response time	6.5 ms
Contrast ratio (typical)	4000:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	16.78 million colours
Pixel pitch	0.36375 x 0.36375 mm
Display diagonal (metric)	80 cm

Ports & interfaces

HDMI ports quantity *	2
HDMI version	2.0
HDMI input ports quantity	2
DVI port *	✓
DVI-I ports quantity	1
USB port *	✓
USB ports quantity	2
USB version	2.0
Ethernet LAN *	✓
Ethernet LAN (RJ-45) ports	1
Audio (L/R) in	1
Audio (L/R) out	1
RS-232C	✓
Remote (IR) input	1
Remote (IR) output	1

Audio

Built-in speaker(s) *	✓
Number of built-in speakers	2
RMS rated power	10 W

Design

Product design *	Digital signage flat panel
Placement supported *	Indoor
Product colour *	Black
VESA mounting *	✓

Design

Panel mounting interface	100 x 100,200 x 200 mm
Bezel width (bottom)	1.19 cm

Performance

On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, German, English, Spanish, French, Italian, Japanese, Polish, Russian, Turkish
Mean time between failures (MTBF)	50000 h

Power

Power consumption (typical) *	40 W
Power consumption (standby) *	0.5 W
Energy efficiency class (SDR)	G
Energy consumption (SDR) per 1000 hours	40 kWh
AC input voltage	100-240 V
AC input frequency	50-60 Hz
Energy efficiency scale	A to G

Computer system

Video formats supported	H.264, MPEG, WMV3
Audio formats supported	AAC, HE-AAC, WMA
Image formats supported	BMP, JPEG, PNG

Weight & dimensions

Width	726.5 mm
Depth	69.1 mm
Height	425.4 mm
Weight	5.31 kg

Packaging content

Remote control included	✓
Batteries included	✓
Cables included	AC, IR sensor, RS-232, USB

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%

Logistics data

Harmonized System (HS) code	85285210

8712581765118