

## Fujitsu PRIMERGY TX1310 M5 server 4 TB Tower Intel Xeon E E-2374G 3,7 GHz 16 GB DDR4-SDRAM

**Merk :** Fujitsu

**Productfamilie:** PRIMERGY

**Artikelcode:**  
VFY:T1315SC061IN


**Productnaam :** TX1310 M5

Fujitsu PRIMERGY TX1310 M5. Processorfamilie: Intel Xeon E, Frequentie van processor: 3,7 GHz, Processormodel: E-2374G. Intern geheugen: 16 GB, Intern geheugentype: DDR4-SDRAM, Geheugenlayout: 1 x 16 GB. Totale opslagcapaciteit: 4 TB. Type behuizing: Tower



Processor		Poorten & interfaces	
Processorfabrikant *	Intel	Aantal Ethernet LAN (RJ-45)-poorten *	2
Processorfamilie *	Intel Xeon E	Aantal USB 2.0-poorten	4
Processormodel *	E-2374G	Aantal poorten USB 3.2 Gen 1 (3.1 Gen 1) Type A	2
Frequentie van processor *	3,7 GHz	Aantal poorten USB 3.2 Gen 2 (3.1 Gen 2) Type A	1
Maximale turbofrequentie van processor	5 GHz	Aantal DisplayPorts	1
Aantal processorkernen	4	Totaal aantal SATA-connectoren	7
Processor cache	8 MB	Uitbreidingsmodules	
Chipset moederbord	Intel C256	PCI Express x4 (Gen 3.x) slots	2
Aantal geïnstalleerde processoren	1	PCI Express x16 (Gen 4.x) sleuven	1
Geheugen		Design	
Intern geheugen *	16 GB	Type behuizing *	Tower
Intern geheugentype *	DDR4-SDRAM	Kleur van het product	Zwart
Geheugenslots	4x DIMM	Prestatie	
ECC	✓	Trusted Platform Module (TPM)	✓
Kloksnelheid geheugen	3200 MHz	Trusted Platform Module (TPM) version	2.0
Geheugenlayout	1 x 16 GB	Software	
Maximum intern geheugen *	128 GB	Inclusief besturingsstelsel *	✗
Opslagmedia			
Totale opslagcapaciteit *	4 TB		
Het aantal geïnstalleerde HDD's	2		
HDD capaciteit	2 TB		
RAID support *	✓		

Opslagmedia		Software	
Soorten RAID	0, 1, 10		Windows Server 2022 Datacenter
Aantal 5.25" bays	2		Windows Server 2022 Standard
Soort optische drive *	✘		Windows Server 2022 Essentials
Grafisch		Compatibele besturingssystemen *	Windows Server 2019 Datacenter
Ingebouwde grafische adapter	✓		Windows Server 2019 Standard
Familie ingebouwde grafische adapter	Intel® UHD Graphics		Windows Server 2019 Essentials
On-board graphics adapter model	Intel UHD Graphics P750		SUSE® Linux Enterprise Server 15
Netwerk			Red Hat® Enterprise Linux 8
LAN controller	Intel I210	Energie	
		Redundante voeding *	✘
		Eisen aan de omgeving	
		Bedrijfstemperatuur (T-T)	5 - 45 °C
		Relatieve vochtigheid in bedrijf (V-V)	10 - 85 procent
		Gewicht en omvang	
		Breedte	180 mm
		Diepte	313 mm
		Hoogte	379 mm

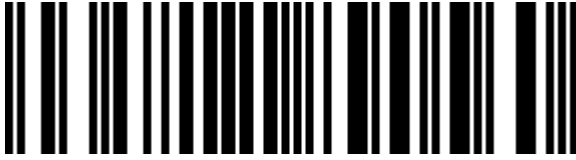

4065221890560

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 27-SEP-2024. Prints or copies of Information are only valid on the printed Publication date