



HP LaserJet Color 3000 Printer 600 x 600 DPI A4

Brand : HP

Series : LaserJet

Model : Q7533A

Product : Color LaserJet 3000 Printer



HP Color LaserJet 3000 Series

HP LaserJet Color 3000 Printer 600 x 600 DPI A4:

HP LaserJet Color 3000 Printer 600 x 600 DPI A4: Colour Access Control (CAC) is a security feature that allows you to restrict access to the printer's internal components and settings.

HP LaserJet Color 3000 Printer 600 x 600 DPI A4: CAC is a security feature that allows you to restrict access to the printer's internal components and settings.

• CAC is a security feature that allows you to restrict access to the printer's internal components and settings.

HP LaserJet Color 3000 Printer 600 x 600 DPI A4: CAC is a security feature that allows you to restrict access to the printer's internal components and settings.

• CAC is a security feature that allows you to restrict access to the printer's internal components and settings.


HP LaserJet Color 3000 Printer 600 x 600 DPI A4: CAC is a security feature that allows you to restrict access to the printer's internal components and settings.

• CAC is a security feature that allows you to restrict access to the printer's internal components and settings.

Specifications		Features	
Print speed (A4/US Letter)	15 ppm	Print volume (A4)	10 ppm
Print *		Tray 1: 76 x 127 to 216 x 356 mm;	Tray 1: 76 x 127 to 216 x 356 mm; Tray 2: 148 x 210 to 216 x 356 mm A4, A5, B5 (JIS), executive (JIS), envelopes (DL, C5, B5) 0.512 GB 5 mm 5 mm 5 mm 5 mm 80 built-in fonts available for both PCL and Postscript emulation, printer-matching screen fonts in TrueType format available with the software solution Tray 1: 60 - 175; Tray 2: 60 - 120 10 ppm Windows 2000: 133 MHz processor, 64 MB RAM; Windows XP: 233 MHz processor, 64 HP Web Jetadmin, HP Easy Printer Care Software, HP Embedded Web Server 6.9 B(A) 55 dB 100 - 127 VAC (+/- 10%), 50/60 Hz (+/- 2 Hz); 220 - 240 VAC (+/- 10%), 50/60 Hz (+/- 2 Hz) 600 DPI Manual (driver support provided) 60000 ppm 15 ppm 29 ppm HP ImageREt 2400
Print *		Tray 2: 148 x 210 to 216 x 356 mm	
Print *		A4, A5, B5 (JIS), executive (JIS), envelopes (DL, C5, B5)	
Print *		0.512 GB	
Print *		5 mm	
Print speed (A4/US Letter) *	29 ppm	Tray 1 (A4)	5 mm
Print	62 ppm	Tray 2 (A4)	5 mm
Print volume (A4/US Letter)	11 ppm	Tray 3 (A4)	5 mm
Print volume (A4/US Letter)	15 ppm	Tray 4 (A4)	5 mm
Print volume (A4) *		80 built-in fonts available for both PCL and Postscript emulation, printer-matching screen fonts in TrueType format available with the software solution	
Print volume *	4	Tray 1: 60 - 175; Tray 2: 60 - 120	
Print volume		10 ppm	
Print *	350 ppm	Windows 2000: 133 MHz processor, 64 MB RAM; Windows XP: 233 MHz processor, 64	
Print *	250 ppm	HP Web Jetadmin, HP Easy Printer Care Software, HP Embedded Web Server	
Print	850 ppm	6.9 B(A)	
Print volume (A4)	250 ppm	55 dB	
Print volume		100 - 127 VAC (+/- 10%), 50/60 Hz (+/- 2 Hz); 220 - 240 VAC (+/- 10%), 50/60 Hz (+/- 2 Hz)	
ISO A	A4	600 DPI	
Print *	A4, A5, B5, C5, DL	Manual (driver support provided)	
ISO A-A (A0...A9) *	A4, A5	60000 ppm	
Non-ISO	Executive	15 ppm	
JIS B-B (B0...B9)	B5	29 ppm	
Print	B5, C5, DL	HP ImageREt 2400	
Print volume (A4)	60 - 120 g/m ²		
Print volume	Paper (plain, glossy), envelopes, labels, cardstock		
Print volume 1	A4, A5, B5 (JIS), executive (JIS), envelopes (DL, C5, B5), 76 x 127 to 216 x 356 mm		
Print volume (A4)	60 - 175 g/m ²		

Specs		Features	
Options	✗	Options	100-sheet multipurpose tray 1, 250-sheet input tray 2, optional 500-sheet paper tray 3, 250-sheet face-down output bin
Network (IPv4)	Via HP Jetdirect Print Servers: TCP/IP (IP Direct Mode; may require software from the NOS vendor or third party vendor: LPD, FTP, IPP), IPX/SPX, DLC/LLC, AppleTalk, Auto-IP, Apple Rendezvous-compatible, NDS, Bindery, NCP, Telnet, SLP, IGMP, BOOTP/DHCP, WINS, SNMP (v 1, 2c, 3), HTTP	Options (EMC)	CISPR 22:1993/EN 55022:1994 Class B, EN 61000-3-2:2000, EN 61000-3-3:1995, EN 55024:1998, FCC Title 47 CFR, Part 15 Class B (USA), ICES-003, Issue 4, (Canada), GB9254-1998, EMC Directive 89/336/EEC with CE Marking (Europe), other EMC approvals as required by individual countries
Performance		Connectivity	
Memory *	32 MB	Options	2
Memory	512 MB	Options	Via HP Jetdirect Fast Ethernet Embedded Print Server (standard for 3000n, 3000dn, 3000dtn), Gigabit (optional), 802.11g wireless (optional), Bluetooth wireless (optional) Optional HP Jetdirect Fast Ethernet Embedded Print Server
Processor	✓	Options	600 x 600 DPI
Processor	MIPS 20KC	Options	60 ppm
Processor	533 MHz	Options	For a list of printer drivers and updated HP printer software for all supported operating systems, go to http://support
Power		Software	
Power (on)	15 W	Options (on)	A4
Power (off)	0.5 W	Options (on) (on)	DDR1 SO DIMM
Storage		Safety	
Options	Mac OS 9.2, Mac OS X v 10.1, 160 MB available hard disk space, USB port or IEEE 1284-B compliant bidirectional parallel port, CD-ROM drive	Options	IEC 60950-1 (International), EN 60950-1 (EU), IEC 60825-1, UL/cUL Listed (US/Canada), GS License (Europe), EN 60825-1 Class 1, 21 CFR Ch. 1/SubCh. J (Class 1 Laser/LED Device), GB4943-2001, Low Voltage Directive 73/23/EEC with CE Marking (Europe). Other safety approvals as required by individual countries
Environment		Download	
Options	10 - 27 °C	Options	Download HP Universal Print Driver Series for Windows 1.0 from http://go/mpd4w or http://go/universal_driver
Options	0 - 35 °C	Options	Microsoft Windows 2000, XP Home, XP Professional, Server 2003, Vista Mac OS 9.2 +
Options (H-H)	10 - 70%	Options	2-line graphical display, 4 lights (Attention, Data, Ready, Toner), 4 buttons (Help, Menu, Select, Stop), 3 navigation arrow buttons (Back, Down, Up)
Options (H - H)	10 - 90%	Options	3
Weight		Paper	
Options	27.1 kg	Options	A4, A5, B5 (JIS), 148 x 210 - 216 x 356 mm
Options x x x	413 x 510 x 430 mm	Options	Sheets: 250; labels: 100
Dimensions		Paper	
Options	30.1 kg	Options	60 - 120 g/m2
Software		Paper	
Options	Print drivers and installation software on CD-ROM (HP PCL 5c, HP PCL 6, HP Postscript emulation)	Options	60 - 120 g/m2
Capacity		Paper	
Options	5 pc(s)	Options	500-sheet paper tray
Options		Paper	
Options (on)	600 DPI	Options (on 2)	100-sheet multipurpose tray, 250-sheet input tray
Options (on)	600 DPI	Options (on 2)	250-sheet face-down output bin
Options	17 - 25 °C	Options (on 3)	409 W
Options Mac	✓	Options/on	Management security: SNMP v3, SSL/TLS (HTTPS); Optional network security: IPsec, 802.1x authentication; Wireless network security: Wi-Fi Protected Access (WPA), WEP encryption (40/64- and 128-bit), 802.1x authentication (EAP-PEAP, LEAP, EAP-TTLS, EAP-TLS, EAP-MD5) with RADIUS servers
I / O	1 USB, 1 EIO	Options/on	Color tables, formatter firmware, software drivers
		Options/on	
		Options	


	Work quickly and efficiently with a fast device that delivers black and white and colour in one. Simplify printer maintenance with HP Smart Printing technology in HP supplies and in the printer.* Experience the advantages of colour, but keep its usage in check with HP's colour access controls.
	499 kg (1100 lbs)
	27 kg (59.6 lbs)
	55 dB(A)
	11
	11
	63.5
	8530 ft
	29.9 kg (66 lbs)
	7.62 cm (3")
	30 ppm
	15 ppm
	53 dB
	39 dB
	575 x 570 x 516 mm

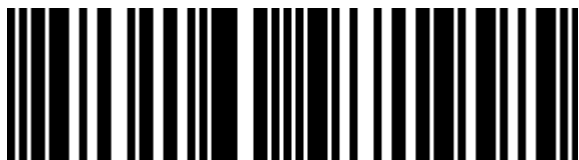

0829160971995




829160971995

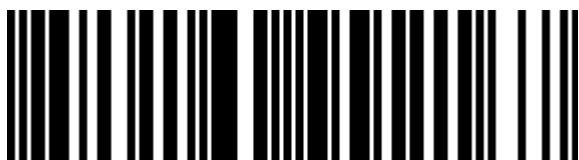

0829160992167




829160992167

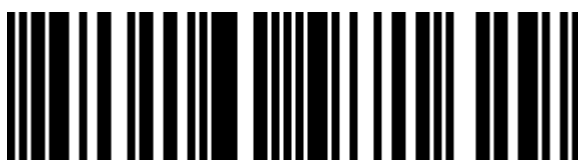

0829160971629




829160971629

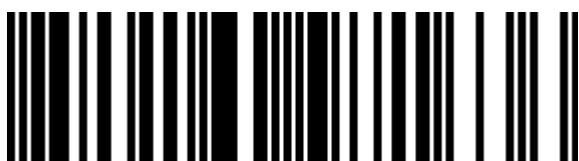

0829160971636




829160971636

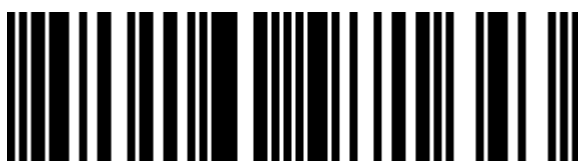

0829160971643




829160971643

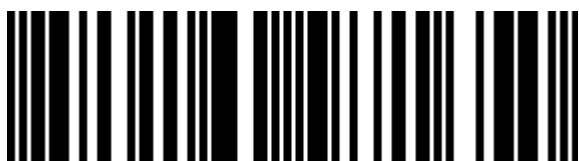

0829160971650



829160971650

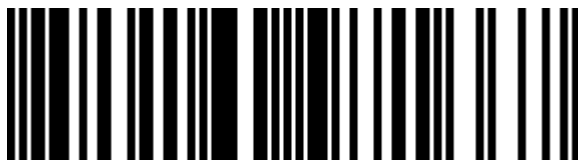

0829160971667



829160971667



0882780167254




882780167254



0882780054844




882780054844

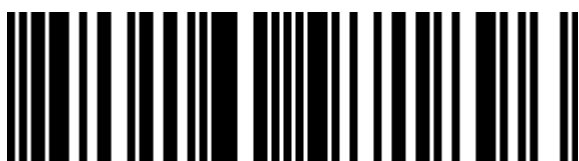

0829160971896




829160971896

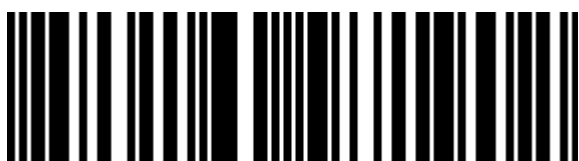

0829160971902



829160971902

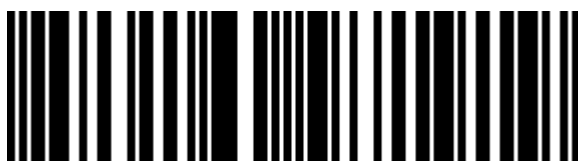

0829160971919




829160971919



0829160971926




829160971926

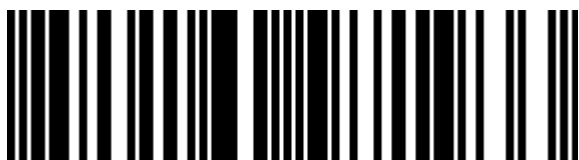

0829160971933




829160971933

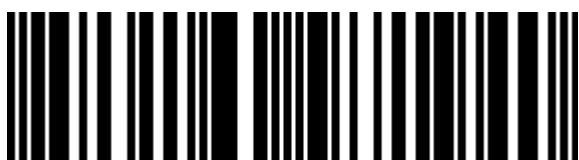

0829160971940




829160971940

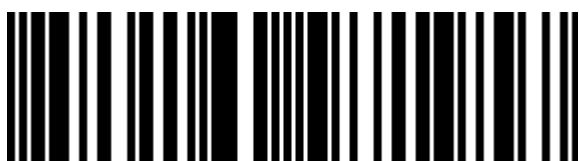

0829160971957




829160971957

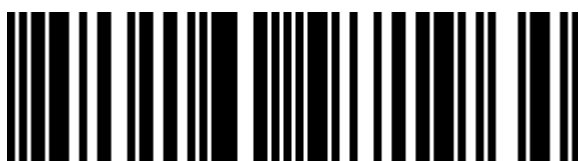

0829160971964




829160971964

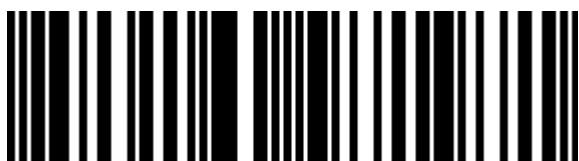

0829160971971




829160971971

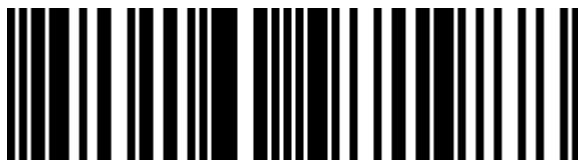

0829160971988




829160971988

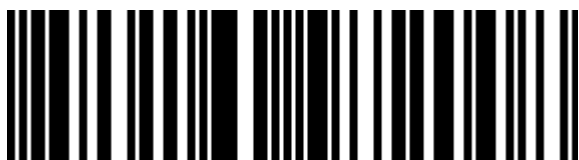

0829160972008




829160972008

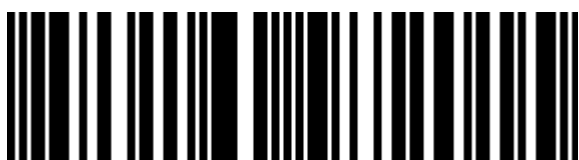

0829160972015



829160972015

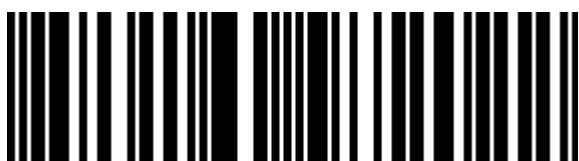

0829160972022




829160972022



0882780054899



882780054899

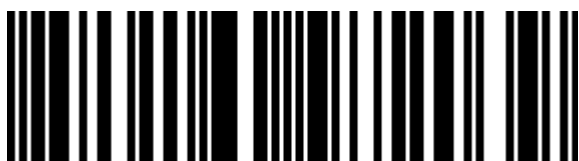

0829160972039



829160972039



0829160971605



829160971605



0829160971612



829160971612

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.