


## ASUS PRIME H510M-A Intel H510 LGA 1200 (Socket H5) micro ATX

**Merk :** ASUS

**Artikelcode:** 90MB17C0-M0EAY0


**Productnaam :** PRIME H510M-A

ASUS PRIME H510M-A. Processorfabrikant: Intel, Processor socket: LGA 1200 (Socket H5), Compatibele processoren: Intel® Celeron®, Intel® Core™ i5, Intel® Core™ i7, Intel® Core™ i9, Intel® Pentium®. Ondersteunde geheugen types: DDR4-SDRAM, Maximum intern geheugen: 64 GB, Geheugen slots type: DIMM. Ondersteunde opslagstationinterfaces: M.2, SATA, Ondersteunde types opslag-drives: HDD & SSD. Maximum resolutie: 4096 x 2304 Pixels. Ethernet interface type: Gigabit Ethernet, LAN controller: Intel® I219-V



Processor		Aansluitingen achterzijde	
Processorfabrikant *	Intel	Aantal USB 2.0-poorten *	4
Processor socket *	LGA 1200 (Socket H5)	Aantal poorten USB 3.2 Gen 1 (3.1 Gen 1) Type A *	2
Compatibele processoren *	Intel® Celeron®, Intel® Core™ i5, Intel® Core™ i7, Intel® Core™ i9, Intel® Pentium®	Aantal Ethernet LAN (RJ-45)-poorten *	1
Max. aantal SMP-processoren	1	PS/2 poort(en)	2
Geheugen		VGA (D-Sub)poort(en) *	1
Ondersteunde geheugen types *	DDR4-SDRAM	Aantal HDMI-poorten *	1
Aantal geheugenslots *	2	HDMI versie	2.0
Geheugen slots type	DIMM	Aantal DisplayPorts	1
Geheugen kanaal	Dubbelkanaals	DisplayPort versie	1.4
Non-ECC	✓	Hoofdtelefoonuitgangen	1
Supported memory clock speeds	2133,2400,2666,2800,2933 MHz	Microfoon, line-in ingang	✓
Maximum intern geheugen *	64 GB	Netwerk	
Niet gebufferd geheugen	✓	Ethernet LAN	✓
Opslag-controllers		Ethernet interface type	Gigabit Ethernet
Ondersteunde types opslag-drives	HDD & SSD	LAN controller	Intel® I219-V
Ondersteunde opslagstationinterfaces *	M.2, SATA	Wifi *	✗
Aantal storage drives ondersteund	5	Kenmerken	
Grafisch		Chipset moederbord *	Intel H510
Maximum resolutie	4096 x 2304 Pixels	Audiochip	Realtek ALC887 / Realtek ALC897
Aantal displays ondersteund	3	Audio-uitgangskanalen *	7.1 kanalen
Interne aansluitingen		Component voor *	PC
USB 2.0 aansluitingen *	2	Moederbord form factor *	micro ATX
USB 3.2 Gen 1 (3.1 Gen 1)-aansluitingen *	1	Moederbord chipset familie *	Intel
Aantal SATA III connectors *	4	Type stroombron	ATX
S/PDIF uitgang	✓	Aantal montagegaten	6
Audioconnector	✓	Ondersteunt Windows	Windows 10 x64
Aansluiting voor audiopaneel aan voorzijde	✓	Uitbreidingsmodules	
		PCI Express x1 (Gen 3.x) slots	2
		PCI Express x16 (Gen 4.x) sleuven	1
		Aantal M.2 (M) slots	1

Interne aansluitingen		BIOS	
ATX Power connector (24-pin)	✓	BIOS type *	UEFI AMI
Aansluitingen voor EATX voedingen	1	Grootte BIOS-geheugen	128 Mbit
Aansluiting voor CPU koeler	✓	Clear CMOS jumper	✓
Aansluitingen voor behuizingsventilatoren	2	<b>Logistieke gegevens</b>	
Peripheral (Molex) power connectors (4-pin)	3	Code geharmoniseerd systeem (HS)	84733020
EPS power connector (8-pin)	✓	<b>Gewicht en omvang</b>	
COM aansluitingen	1	Breedte	226 mm
12V vermogen-connector	✓	Diepte	211 mm
RGB LED-aansluitrail	✓	<b>Inhoud van de verpakking</b>	
		Meegeleverde kabels	SATA
		Meegeleverde drivers	✓

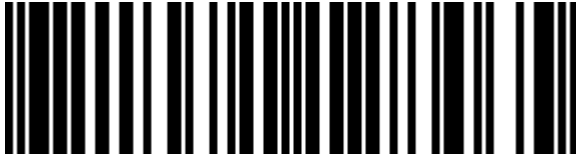

4711081128465

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 07-OCT-2024. Prints or copies of Information are only valid on the printed Publication date